

LARGE CAPACITY/VOLUME HOSE REELS 1195 SERIES

COXREELS® 1195 Series motor driven hose reels are designed to handle long lengths of large diameter hose for increased volume delivery. Coxreels' exclusive low profile outlet riser and open drum design provide a noncrimping, flat smooth hose wrap. The sturdy all welded "A" frame base provides exceptional strength to handle the extra weight without sacrificing performance, even in demanding mobile applications.

1195 SERIES MODELS - ALL REELS SUPPLIED LESS HOSE

MODEL	STANDARD CAP			OPTIONAL CAP. Reducer required			INLET SWIVEL ASSEMBLY	OUTLET RISER	PSI	APRX. LBS.	SIZE INDEX
	I.D.	O.D.	FT.	I.D.	O.D.	FT.					
1195-932-X	2"	29 ¹ / ₁₆ "	50	1 ¹ / ₂ "	2 ¹ / ₁₆ "	60	2" F NPT	2" F NPT	600	128	1
1195-1332-X	2"	29 ¹ / ₁₆ "	75	1 ¹ / ₂ "	2 ¹ / ₁₆ "	100	2" F NPT	2" F NPT	600	148	3
1195-2032-X	2"	29 ¹ / ₁₆ "	115	1 ¹ / ₂ "	2 ¹ / ₁₆ "	150	2" F NPT	2" F NPT	600	186	5
1195-1728-X	2"	29 ¹ / ₁₆ "	60	1 ¹ / ₂ "	2 ¹ / ₁₆ "	85	2" F NPT	2" F NPT	600	134	2
1195-2428-X	2"	29 ¹ / ₁₆ "	90	1 ¹ / ₂ "	2 ¹ / ₁₆ "	135	2" F NPT	2" F NPT	600	169	4
1195-3228-X	2"	29 ¹ / ₁₆ "	125	1 ¹ / ₂ "	2 ¹ / ₁₆ "	175	2" F NPT	2" F NPT	600	218	6

- SUFFIX "X" OPTIONS


These models are not available in direct hand crank models. When ordering, substitute the "X" with selection below. Add 5 lbs to ship weight if reel is crated.

SUFFIX	TYPE	DESCRIPTION	ADD ON APRX. LBS*
AB	AIR - #6 GAST	COMP. AIR MOTOR	8
EB	ELEC. - 24V DC	1/2 HP REW. REV. TYPE	26
ED	ELEC. - EXPL. PRF. - 12V DC	1/2 HP REW. REV. TYPE	26
EA	ELEC. - EXPL. PRF. - 115V	1/2 HP REW., AC REV. TYPE	26
H	HYDRAULIC	END PORTED 9/16-18 UNF REV.	6
C	FRONT HAND CRANK	BEVEL GEARED CRANK	3

REEL DIMENSIONS Technical Data Sheets Available On Website

SIZE INDEX	W	H	L	X	Y	Ø	Dw
1	22 ³ / ₄ "	33 ¹ / ₄ "	32"	15"	25 ⁵ / ₈ "	15 ¹ / ₂ "	9 ¹ / ₂ "
2	33 ¹ / ₄ "	30 ¹ / ₄ "	28"	25 ¹ / ₂ "	24 ¹ / ₂ "	15 ¹ / ₂ "	17 ¹ / ₂ "
3	26 ³ / ₄ "	33 ¹ / ₄ "	32"	19"	25 ⁵ / ₈ "	15 ¹ / ₂ "	13 ¹ / ₂ "
4	37 ¹ / ₄ "	30 ¹ / ₄ "	28"	29 ¹ / ₂ "	24 ¹ / ₂ "	15 ¹ / ₂ "	24"
5	30 ³ / ₄ "	33 ¹ / ₄ "	32"	23"	25 ⁵ / ₈ "	15 ¹ / ₂ "	20"
6	45 ¹ / ₄ "	30 ¹ / ₄ "	28"	37 ¹ / ₂ "	24 ¹ / ₂ "	15 ¹ / ₂ "	32"

Overall Dimensions
Base
Drum

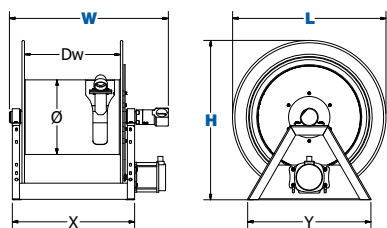

1195 SERIES :: REEL SPECIFICATIONS

SWIVEL

- External fluid path with electroless nickel plated steel 90° full-flow NPT swivel inlet
- Swivel Seals: VITON®

DESIGN & STRUCTURE

- All welded steel "A" frame construction for superior reel structure
- Exclusive low profile outlet riser & open drum slot design for flat smooth hose wrap
- Robust lubricated horizontal surface mount bearings for easy rotation
- Adaptor for Victaulic connections available, consult factory
- Adjustable tension brake to prevent "free-wheeling" during operation

RETRACTION

- Reliable chain & sprocket drive on motor driven models
- Bevel geared crank rewind (On models with suffix -C) See Motor Options Chart

SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat process
- Rolled edges & ribbed discs provide strength & safety
- Leading 2-year manufacturer's limited warranty
- Made in the U.S.A. - Sold & Supported Worldwide

POSSIBLE FIELDS OF APPLICATION

- High Volume Delivery
- Bulk Liquid Handling
- Water Trucks
- Mining Operations
- Construction Sites
- Farming
- Chemical Fluid Transfer
- Aviation Refueling
- Fuel Trucks

ACCESSORIZE YOUR REEL :: PG 50

- O-Rings & Swivels
- Roller Brackets
- Hoses
- Assorted Reel Accessories

