Petroleum

PROFESSIONAL GRADE FEATURES

100% PURE COXREELS QUALITY

ADJUSTABLE SOLID RUBBER HOSE STOP *for lead length positioning*

VERSATILE GUIDE ARM *adjusts to wall, floor, ceiling & vehicle mounting*

EXTERNAL FLUID PATH WITH FULL FLOW BRASS NPT SWIVEL *that screws directly on 1" solid steel axle, swivel is easily removed for fast, easy maintenance*

- Viewable on opposite side

HEAVY DUTY SPUN DISCS *with rolled edges for greater strength, made with first of it's kind CNC robotic spin cell*

HIGH QUALITY STEEL CONSTRUCTION *with our durable CPC™ powder coat finish*

ENCLOSED FACTORY TUNED AND MATCHED CARTRIDGE-STYLE SPRING MOTOR, *easily removed for safe & convenient replacement*

- Viewable on opposite side

TRIPLE AXLE SUPPORT WITH SUPER HUB™ & A FULL FRAME *increased reel strength for more demanding applications*

Only on T Series. SH Series features dual axle support

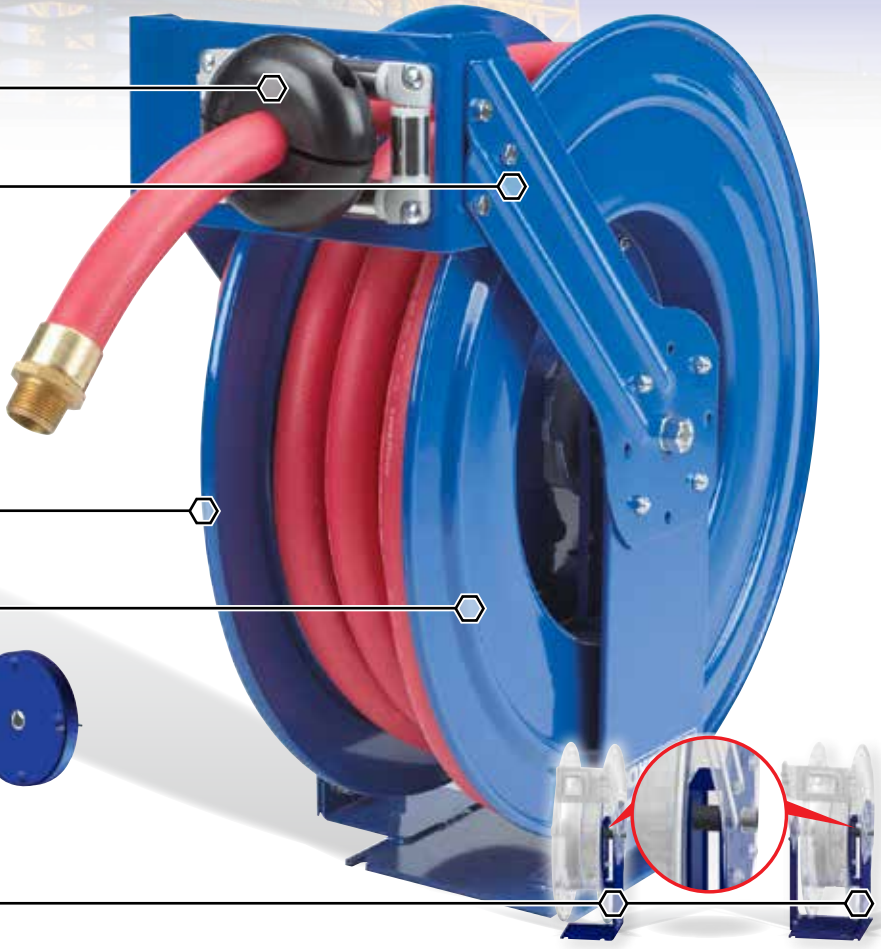

POSSIBLE FIELDS OF APPLICATION

- Fuel Storage & Dispensing System
- DEF Storage & Dispensing Sytem
- Fuel Tank Trucks
- Fuel/Lube Trucks
- In Plant Refueling
- Vehicle Refueling
- Aircraft Refueling
- Ship Refueling
- Offshore

COXREELS®

Petroleum

DEF SERIES & FUELING REELS

FUEL SERIES

- Machined from solid brass 90º full-flow NPT swivel inlet
- Swivel Seals: NITRILE
- Fuel dispensing hose designed to convey non-aromatic fuels including diesel, kerosene, fuel oil & heating oil

DEF SERIES

- Non-corrosive stainless steel 90º full-flow NPT swivel for Diesel Exhaust Fluid (DEF) dispensing applications
- Swivel Seals: VITON®
- DEF dispensing hose designed to convey the high-purity, aqueous urea solution DEF.

FUEL MODEL	EZ-Coil® Safety Line	I.D.	FT.	PSI	APRX. LBS.	W x H x L
SHF-N-525	EZ-SHF-525	¾"	25	300	57	9⅜ x 25½ x 19½"
TSHF-N-550	EZ-TSHF-525	¾"	50	300	91	9⅞ x 25½ x 24"
TSHF-N-635	-	1"	35	300	95	10 x 25½ x 24"
TSHF-N-650	-	1"	50	300	101	12 x 25½ x 24"

DEF MODEL	EZ-Coil® Safety Line	I.D.	FT.	PSI	APRX. LBS.	W x H x L
SH-N-525-DF-BBX	EZ-SH-N-525-DF-BBX	¾"	25	300	57	8¼ x 21¼ x 24"
SH-N-550-DF-BBX	EZ-SH-N-550-DF-BBX	¾"	50	300	76	9⅞ x 25½ x 24"
TSH-N-550-DF-BBX	EZ-TSH-N-550-DF-BBX	¾"	50	300	91	9⅞ x 25½ x 24"

SP SERIES

- External fluid paths with machined from solid brass 90º full-flow NPT swivel inlets
- Swivel Seals: NITRILE (AFLAS on 1" models)
- Reel features a sturdy box-style frame design. Reel adjusts to wall, floor, vehicle & overhead position
- Long lasting self-lubricated flange bearings for smooth rotation
- Available in Medium Pressure

* Supplied with fuel hose

MODEL	I.D.	O.D.	FT.	PSI	APRX. LBS.	W x H x L
SLPL-550	¾"	1 1⁄16"	50	300	86	19⅝ x 20½ x 22⅞"
SLPF-550*	¾"	1 3⁄16"	50	300	107	19⅝ x 20½ x 22⅞"
SLPL-575	¾"	1 1⁄16"	75	300	117	19⅝ x 24½ x 26⅜"
SLPL-650	1"	1 ½"	50	300	109	19⅝ x 24½ x 26⅜"
SLPF-650*	1"	1 ½"	50	300	142	21 x 28½ x 30⅜"
SLPL-675	1"	1 ½"	75	300	148	21 x 28½ x 30⅜"
SLPL-750	1 ½"	1 13⁄16"	50	250	123	18 x 28½ x 30⅜"
SLPL-850	1 ½"	2 1⁄16"	50	250	138	20 x 28½ x 30⅜"

1125 SERIES

- External fluid path with machined from solid brass 90º full-flow NPT swivel inlet (Nickel plated steel swivel on 1" models)
- Swivel Seals: NITRILE (AFLAS on 1" models)
- Exclusive low profile outlet riser & open drum slot design for flat smooth hose wrap. All welded steel "A" frame construction for superior reel structure

MODEL	MOTOR OPTION	I.D.	FT.	PSI	APRX. LBS.	W x H x L
1125-5-100	Electric Motor Options Available	¾"	100	3,000	42	26¾ x 18¾ x 17⅝"
1125-5-175		¾"	175	3,000	50	32¾ x 18¾ x 17⅝"
1125-5-200		¾"	200	3,000	55	38¾ x 18¾ x 17⅝"
1125-5-250		¾"	250	3,000	59	42¾ x 18¾ x 17⅝"
1125-6-50		1"	50	3,000	55	42¾ x 18¾ x 17⅝"
1125-6-100		1"	100	3,000	69	32 x 18½ x 17⅝"

1175 SERIES

- External fluid path with machined from solid brass 90º full-flow NPT swivel inlet
- Swivel Seals: AFLAS
- Exclusive low profile outlet riser, open drum slot design for flat smooth hose wrap. All welded steel "A" frame construction for superior reel structure

MODEL	MOTOR OPTION	I.D.	O.D.	FT.	PSI	APRX. LBS.	W x H x L
1175-6-50	Electric Motor Options Available	1"	1 7⁄16"	50	3,000	67	24⅛ x 26⅛ x 24"
1175-6-100		1"	1 7⁄16"	100	3,000	70	28⅛ x 26⅛ x 24"
1175-6-150		1"	1 7⁄16"	150	3,000	75	32⅛ x 26⅛ x 24"
1175-6-200		1"	1 7⁄16"	200	3,000	83	36⅝ x 26⅛ x 24"

1185 SERIES

- External fluid path with in-line aluminium straight, full flow NPT swivel inlet
- Swivel Seals: NITRILE
- Exclusive low profile outlet riser, open drum slot design for flat smooth hose wrap. All welded steel "A" frame construction for superior reel structure

MODEL	MOTOR OPTION	I.D.	O.D.	FT.	PSI	APRX. LBS.	W x H x L
1185-1124	Electric Motor Options Available	1 ½"	2 1⁄16"	50	600	76	25 x 26 x 24"
1185-1524		1 ½"	2 1⁄16"	75	600	81	29 x 26 x 24"
1185-2024		1 ½"	2 1⁄16"	100	600	94	33½ x 26 x 24"
1185-2528		1 ½"	2 1⁄16"	150	600	122	38½ x 30 x 28"

1195 SERIES

- External fluid path with in-line aluminium straight, full flow NPT swivel inlet
- Swivel Seals: VITON®
- Exclusive low profile outlet riser, open drum slot design for flat smooth hose wrap. All welded steel "A" frame construction for superior reel structure

MODEL	MOTOR OPTION	I.D.	O.D.	FT.	PSI	APRX. LBS.	W x H x L
1195-932	Electric Motor Options Available	2"	2 9⁄16"	50	600	128	22¾ x 33¼ x 32"
1195-1332		2"	2 9⁄16"	75	600	148	26¾ x 33¼ x 32"
1195-2032		2"	2 9⁄16"	115	600	186	30¾ x 33¼ x 32"

CHOICE OF MOTORS

Option - A Air Motor 4 Gast

Option - AB Air Motor 6 Gast

Option - E & EF 12V & 24V Motor

Option - EA, EB & ED Explosion Proof 12V, 24V & 115V

Option - H Hydraulic Motor

SD SERIES

- Available with 7 strand x 7 wire galvanized steel
- Models SD-XX-**1** & SDH-XXX-**1** come with 7 strand x 7 stainless steel cable
- High visibility orange vinyl cable cover
- Compact static discharge cable reel available in spring rewind or direct hand crank retraction
- Non corrosive stainless steel spring, pawl & zinc plated ratchet

MODEL	EZ-Coil® Safety Line	O.D.	FT.	APRX. LBS.	W x H x L
SD-35	EZ-SD-35	5⁄32"	35	18	3⅞ x 11½ x 11"
SD-50	EZ-SD-50	5⁄32"	50	20	3⅞ x 11½ x 11"
SD-75	EZ-SD-75	5⁄32"	75	31	4 x 15 x 14½"
SD-100	EZ-SD-100	5⁄32"	100	32	4 x 15 x 14½"
SD-35-1	EZ-SD-35-1	5⁄32"	35	18	3⅞ x 11½ x 11"
SD-50-1	EZ-SD-50-1	5⁄32"	50	20	3⅞ x 11½ x 11"
SD-75-1	EZ-SD-75-1	5⁄32"	75	31	4 x 15 x 14½"
SD-100-1	EZ-SD-100-1	5⁄32"	100	32	4 x 15 x 14½"
SDH-100	-	5⁄32"	100	24	5¾ x 11½ x 11"
SDH-200	-	5⁄32"	200	28	5¾ x 11½ x 11"
SDH-100-1	-	5⁄32"	100	24	5¾ x 11½ x 11"
SDH-200-1	-	5⁄32"	200	28	5¾ x 11½ x 11"

This selection only represents a sample of products applicable in this industry. Please visit us online or consult the factory for more product options.

mdi - Manufacturers Distributor, Inc Phone: (727) 835-0673 | Fax: (813) 571 – 0422 www.CoxreelSales.com | Sales@CoxreelSales.com